

Preliminary

Vertex N


N-type i-TOPCon

BACKSHEET MONOCRYSTALLINE MODULE

TSM-NE09RH.05 415-435W

435W / MAXIMUM POWER OUTPUT

21.8% / MAXIMUM EFFICIENCY

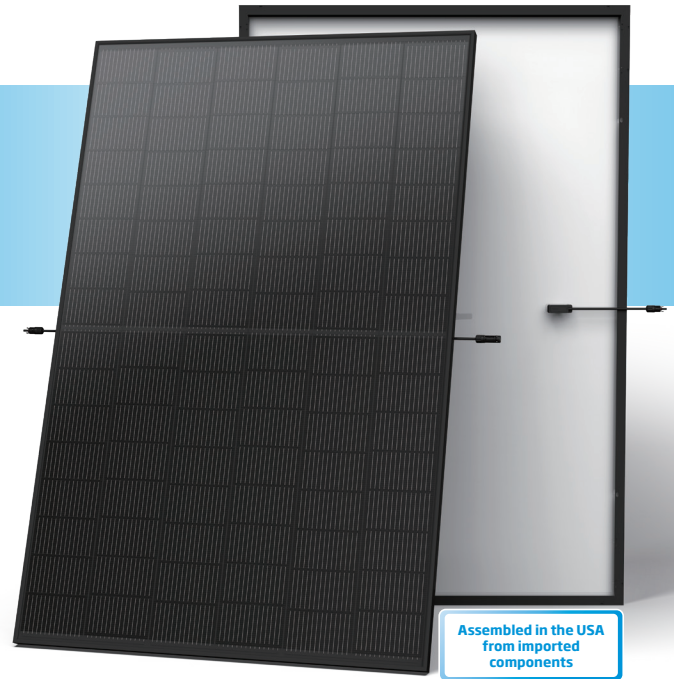

Small in size, bigger on power

- Up to 435W, 21.8% module efficiency with high density interconnect technology
- Reduce installation cost with higher power bin and efficiency
- Boost performance in warm weather with low temperature coefficient and operating temperature



High Reliability

- Innovative non-destructive cutting for improved mechanical resistance and strength
- Excellent fire rating, weather resistance, salt spray, sand dust, ammonia performance which is fully applicable in coastal, high temperature, humidity area and harsh environment



Ultra-low Degradation, higher output


- First-year degradation 1% and annual degradation at 0.4%
- Up to 25 years product warranty and 25 years power warranty



Ideal for residential and C&I rooftops

- Easy for integration, designed for compatibility with existing mainstream inverters and diverse mounting systems
- Perfect size and low weight for handling and installation
- Most valuable solution on low load capacity rooftops (weight similar to backsheet version)
- Mechanical performance more than 6000 Pa positive load and up to 5400 Pa negative load

Performance Warranty

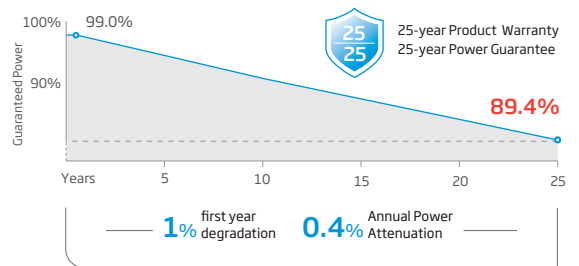

* Please refer to product warranty for details

Comprehensive Products and System Certificates

IEC61215/IEC61730/UL61730

ISO 9001: Quality Management System

ISO 14001: Environmental Management System

ISO14064: Greenhouse Gases Emissions Verification

ISO45001: Occupational Health and Safety Management System



CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

© 2024 Trina Solar Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.

Version number: TSM_EN_2024_PA4

Trina solar

ELECTRICAL DATA (STC)

Peak Power Watts- $P_{MAX}(W_p)^*$	415	420	425	430	435
Power Tolerance- $P_{MAX}(W_p)$			0 ~ +3%		
Maximum Power Voltage- $V_{MPP}(V)$	28.1	28.3	28.5	28.8	29.1
Maximum Power Current- $I_{MPP}(A)$	14.78	14.84	14.88	14.93	14.99
Open Circuit Voltage- $V_{oc}(V)$	33.4	33.7	33.9	34.3	34.5
Short Circuit Current- $I_{sc}(A)$	15.75	15.80	15.84	15.89	15.96
Module Efficiency $\eta_m(\%)$	20.8	21.0	21.3	21.5	21.8

 STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%.

ELECTRICAL DATA (NOCT)

Peak Power Watts- $P_{MAX}(W_p)$	318	321	324	329	334
Maximum Power Voltage- $V_{MPP}(V)$	26.4	26.6	26.8	27.1	27.4
Maximum Power Current- $I_{MPP}(A)$	12.03	12.07	12.10	12.14	12.20
Open Circuit Voltage- $V_{oc}(V)$	31.8	32.1	32.3	32.6	33.0
Short Circuit Current- $I_{sc}(A)$	12.67	12.71	12.74	12.78	12.84

 NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

TEMPERATURE RATINGS



NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P_{MAX}	-0.29% /°C
Temperature Coefficient of V_{oc}	-0.24% /°C
Temperature Coefficient of I_{sc}	0.04% /°C

MAXIMUM RATINGS

Operational Temperature	-40 ~ +85°C
Maximum System Voltage	1500V DC (IEC) 1500V DC (UL)
Max Series Fuse Rating	25A

CURVES OF PV MODULE

Preliminary

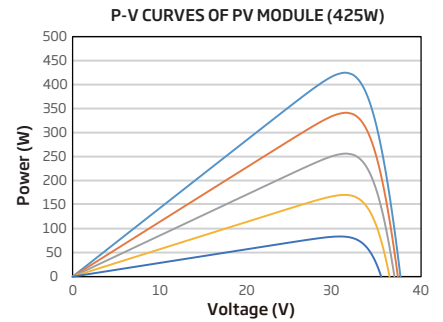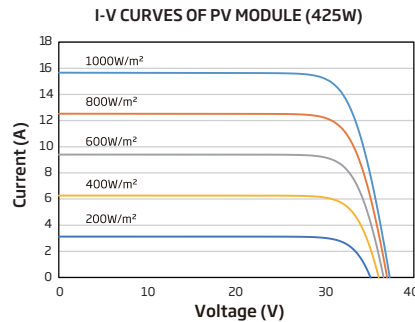
MECHANICAL DATA

Solar Cells	N-type i-TOPCon Monocrystalline
No. of cells	96 cells
Module Dimensions	1762×1134×35 mm (69.37×44.65×1.38 inches)
Weight	21.5 kg (47.40 lb)
Front Glass	3.2mm (0.13inches), AR Coated Tempered Glass
Backsheet	White-black Opaque Backsheet
Frame	35mm(1.38 inches) Anodized Aluminium Alloy, Black
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²) Landscape: 1100 mm/ 1100 mm (43.31/43.31 inches)
Connector	MC4 EVO2
Packaging	Modules per box: 31 pieces Modules per 53' container: 868 pieces
Fire Type	Type 1 or Type 2

*Please refer to regional datasheet for specified connector.

